

DESCRIPTION

The new NEXEM EU2 series is PC-board mount type and suitable for various motor and solenoid controls application in the automobiles which require high quality and high performance.

The EU2 series is the ultra low profile SMD relay. The EU2 series is succeeding in about 75% of low profiling in comparison with the ET2 series which is low profile type. And it's basic characteristics are same as the EX2 series which is miniature and high performance.

FEATURE

- Twin type (Two relays in one housing)
- SMD
- Low profile (Approx. 75% relay height of ET2, Approx. 57% relay height of EX2)
- Light weight (Approx. 80% relay weight of ET2, Approx. 94% relay weight of EX2)
- Pb free
- Tape & Reel packaging

APPLICATION

- Motor control
- Solenoid control


For Proper Use of Miniature Relays DO NOT EXCEED MAXIMUM RATING

Do not use relay under excessive conditions such as over ambient temperature, over voltage and over current. Incorrect use could result in abnormal heating and damage to the relay or other parts.

READ CAUTIONS IN THE SELECTION GUIDE

Read the cautions described in EM Devices' "Miniature Relays" (9600RSGVOL11E1003N1) before dose designing your relay applications.


The information in this document is subject to change without notice.

© EM Devices Corporation 2017




- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.


SCHEMATIC (TOP VIEW)

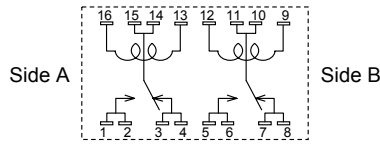

DIMENSIONS [mm]

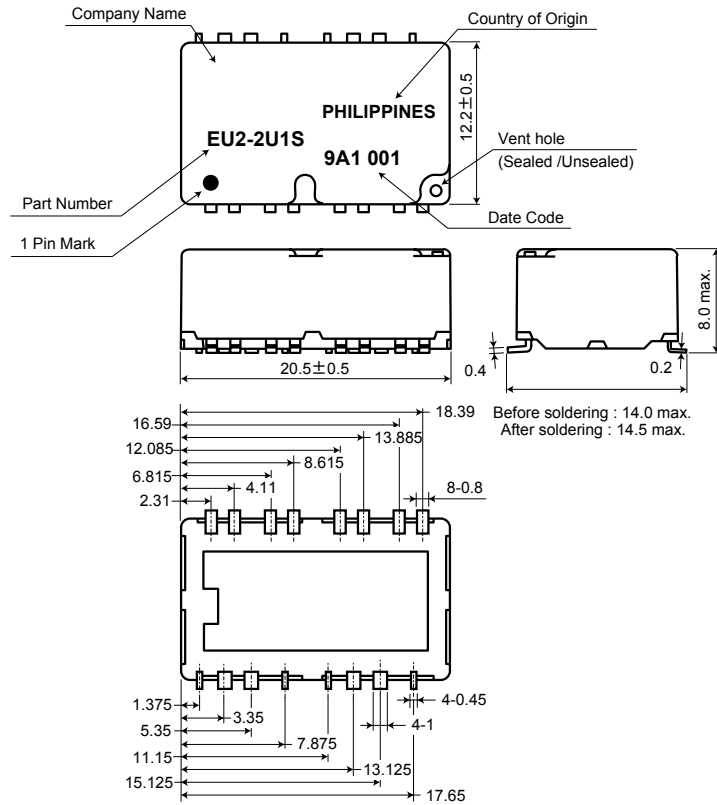

PCB PAD LAYOUT [mm] (TOP VIEW)

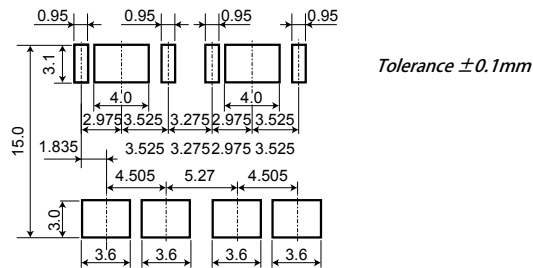

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

SPECIFICATIONS

(Ambient temperature:20°C)

Items		Specifications
Contact Form		1 Form C × 2 (separate)
Contact Ratings	Maximum Switching Voltage	16VDC
	Maximum Switching Current	30 A
	Minimum Switching Current	1A (5VDC)
	Maximum Carrying Current	25A (10minutes Max., Coil Voltage 14VDC) ^{*1}
	Contact Resistance	4mΩ typical (measured at 7A) initial
Contact Material		Silver oxide complex alloy
Operate Time (Excluding bounce)		2.5 ms typical (at Nominal Voltage)
Release Time (Excluding bounce)		3ms typical (at Nominal Voltage, with diode) initial
Nominal Operating Power		960mW
Insulation Resistance		100MΩ at 500 VDC
Withstand Voltage	Between open contacts	500 VAC min. (for 1 minute)
	Between coil and contacts	500 VAC min. (for 1 minute)
Shock Resistance	Misoperation	98 m/s ² (10G)
	Destructive Failure	980 m/s ² (100G)
Vibration Resistance	Misoperation	10 to 300Hz, 43m/s ² (4.4G)
	Destructive Failure	10 to 500Hz, 43m/s ² (4.4G), 200hours
Ambient Temperature		- 40 to + 85°C
Running Specifications	Non-load	1 × 10 ⁶ operations
	Load	100 × 10 ³ operations (at 14VDC, Motor Load 25A) 100 × 10 ³ operations (at 14VDC, Motor Load 25A/7A)
Weight		Approx. 6g

*1 Mounted on PC-board: FR-4 (Thickness; 1.6mm), Copper (Thickness; 105 μm,Width; 10mm, Length; 40mm)

COIL RATING

(Ambient temperature:20°C)


Part Numbers	Nominal Voltage (VDC)	Coil Resistance (Ω) ± 10%	Must Operate Voltage ^{*2} (VDC)	Must Release Voltage ^{*2} (VDC)
EU2-2U1	12	150	6.5	0.6

*2 Test by pulse voltage



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.



PART NUMBER SYSTEM

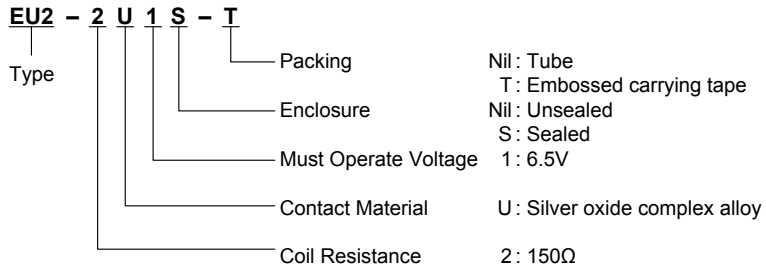

TECHNICAL DATA

Coil Temperature Rise






(Ambient temperature:23°C)

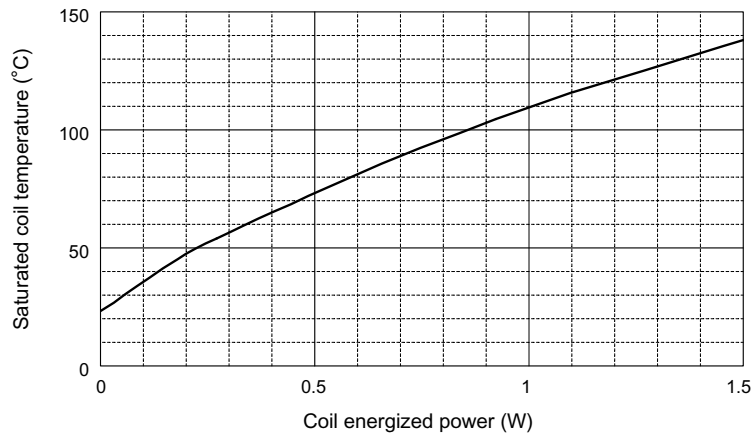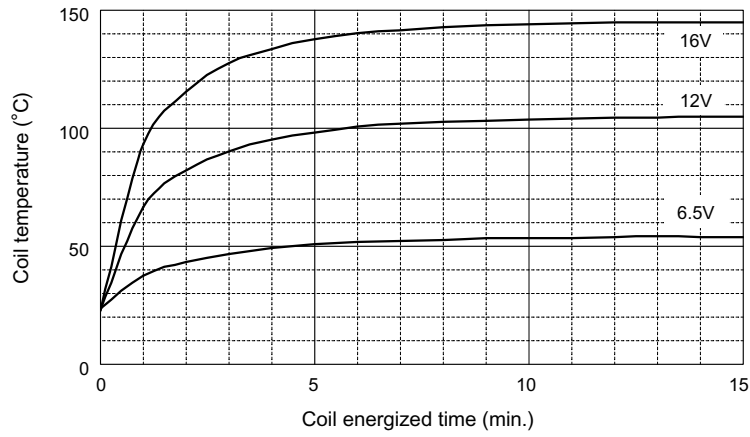

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

RELAY CHARACTERISTICS DISTRIBUTION (INITIAL)





Specimen : EU2-2U1S
 Ambient Temperature : 20°C
 Quantity : 25pcs.

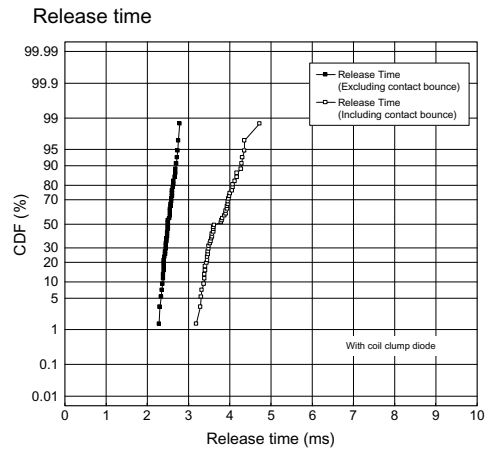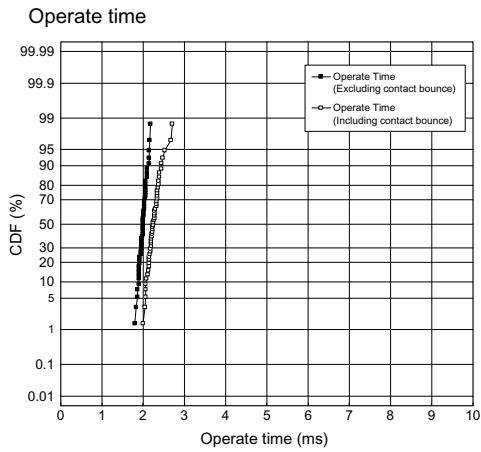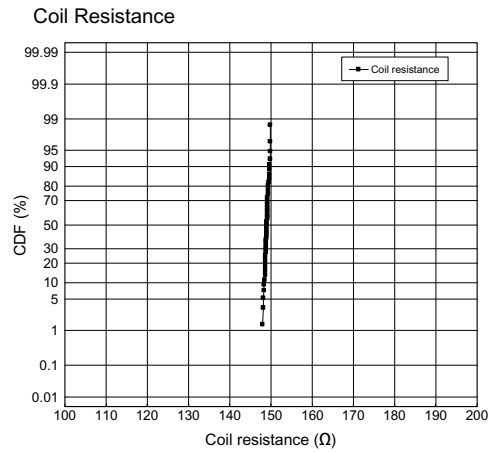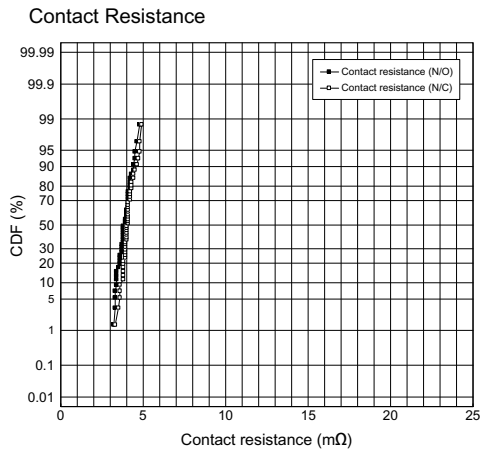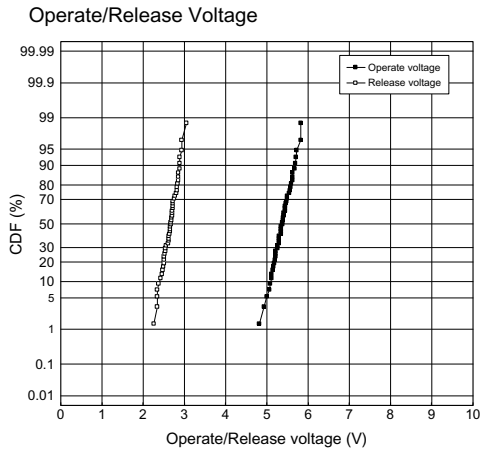






- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

ELECTRICAL LIFE TEST (14VDC-25A, P/W motor, Lock)

Test items	Test conditions	Samples
1. Operate voltage 2. Release voltage 3. Contact resistance 4. Coil resistance 5. Operate time 6. Release time (with coil clump diode)	Temperature : 23°C Frequency : 0.1Hz(0.2s ON, 9.8s OFF) Contact load : 14VDC-25A, P/W motor, Lock Number of operations : 100 x 10 ³	EU2-2U1S 10 pcs

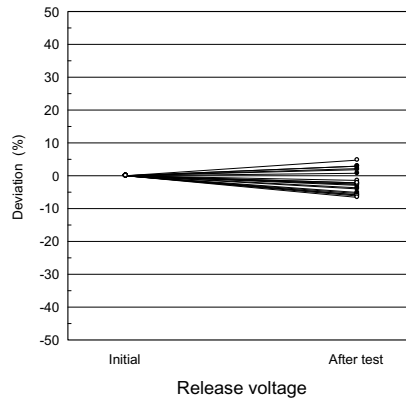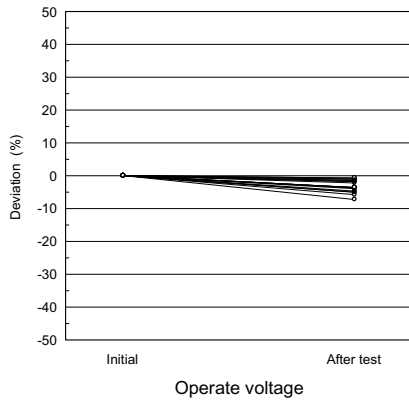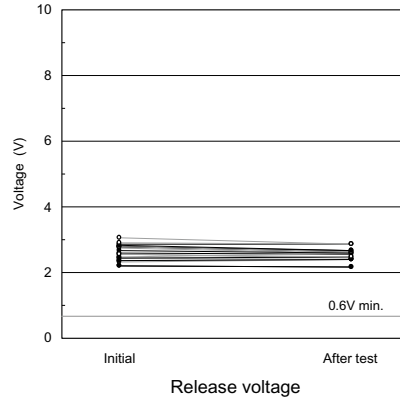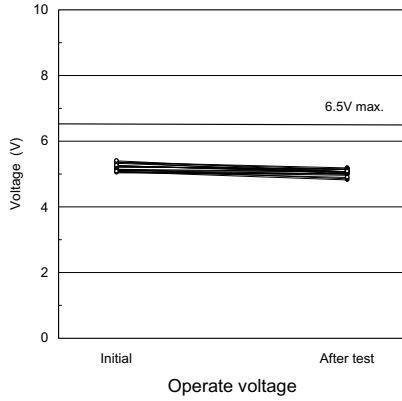

● All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
 ● Please request for a specification sheet for detailed product data prior to the purchase.
 ● Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

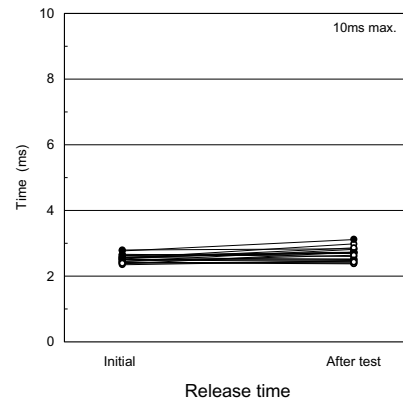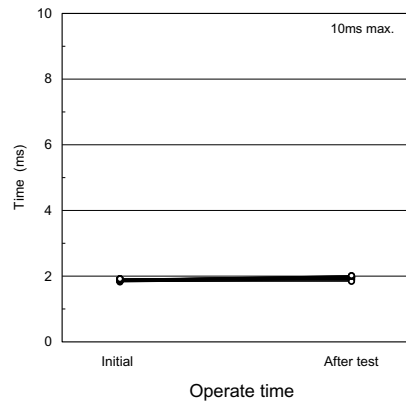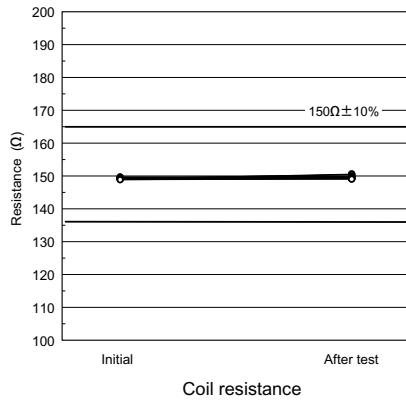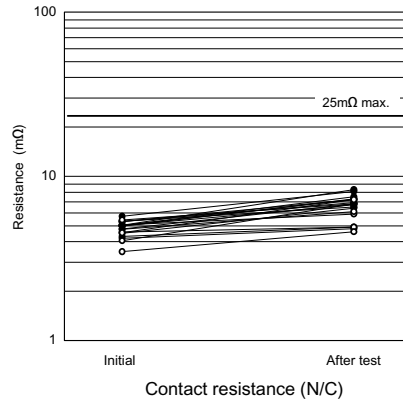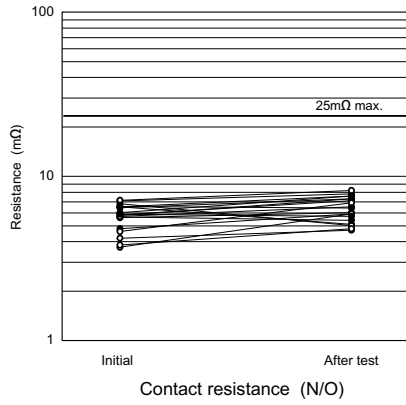

19654 Eighth Street East, P.O. Box 517, Sonoma, CA 95476 (707) 996-5201
www.worldproducts.com sales@worldproducts.com



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact EM Devices for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.