



adler®

AX6 gPV 1500 VDC Fuse




FEATURES:

- 1500 VDC, PV fuse link
- Rated Current: 100-200 A
- Rated Breaking Capacity: 10 kA at 1500 VDC
- Time Constant: 1-3 ms (but 30kA is 1.6ms)
- Ref. to UL 248-19; IEC 60269-6
- Approvals: UL (File: E490190)
- BH1XL Fuse base

ELECTRICAL SPECIFICATIONS


Part Number	Rated Current	Ampere Code	Breaking Capacity	I ² t (A ² s)		Dissipation (W)	
				Pre-Arcing	Total	0.8 I _n	1.0 I _n
AX63100b0F	100 A	3100	10 kA@1500 VDC 30 kA@1500VDC(self)	1494	5468	18	34
AX63125b0F	125 A	3125		2120	9950	20	37
AX63160b0F	160 A	3160		3340	23404	25	45
AX63200b0F	200 A	3200		5480	24800	39	55

PART NUMBER SYSTEM

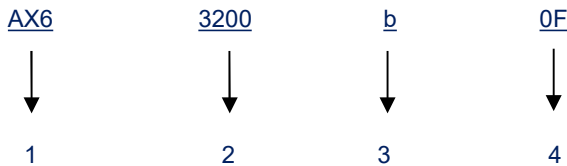


- 1Product Series AX6
- 2 Ampere Code 200 A (see Ampere code column of electrical specifications)
- 3Rated Voltage..... b: 1500 VDC
- 4 Supplementary Code 0F: default


DIMENSIONS (mm)

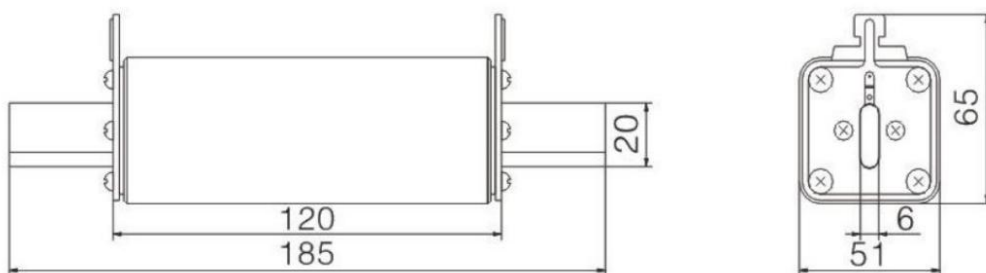

TIME CURRENT CURVE

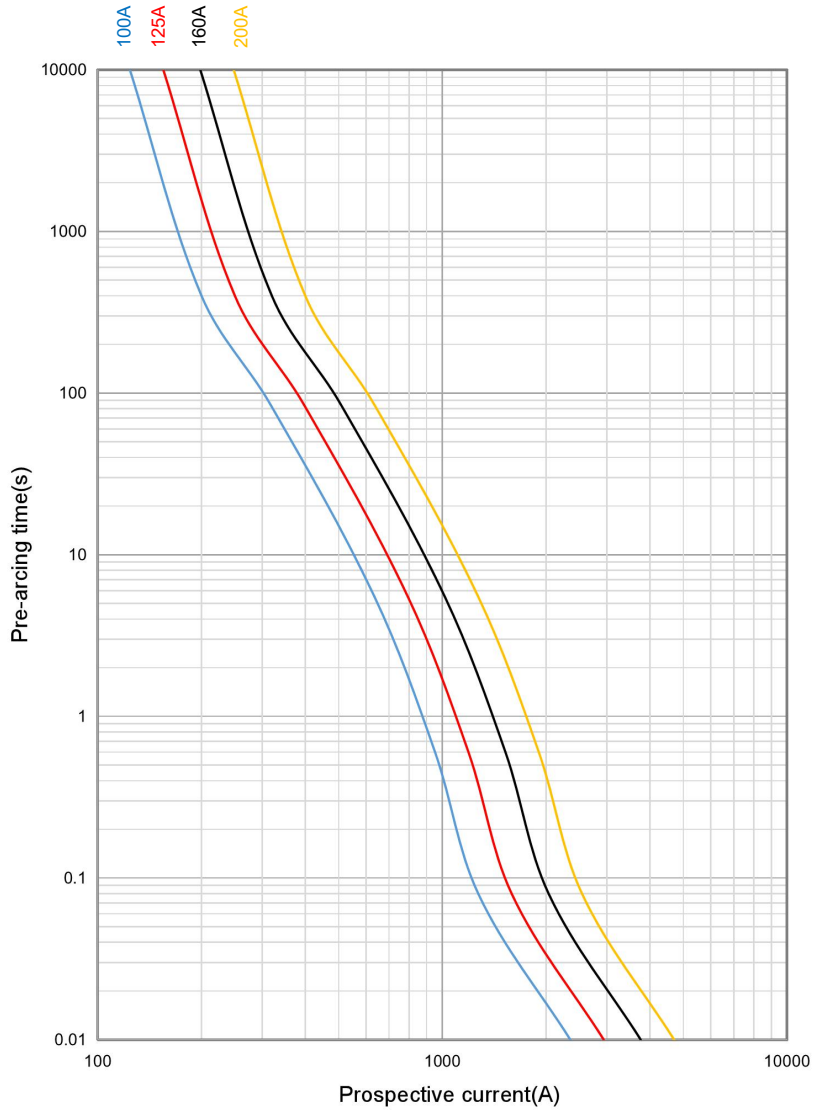


Printing Standard:

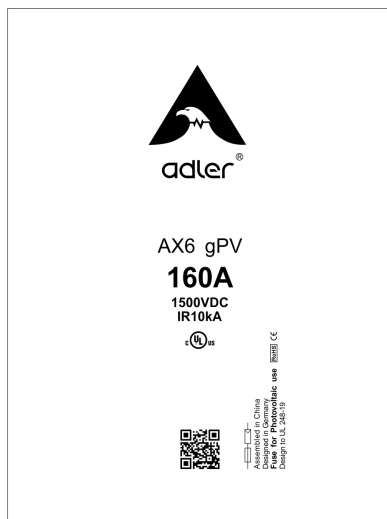

PACKAGING INFORMATION

	Quantity of holder	Gross weight	Box size	Label size
Inner box	1	1KG	19X5.5X7.3cm	40X60mm
Outer carton box	16	16KG	45.5X20X16.5cm	60X80mm

Inner Box





变量
字号 : 10pt (加粗)

变量
字号 : 8pt

字号 : 7pt

Outer carton box

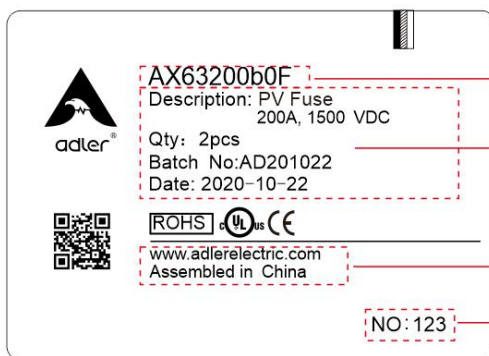


变量
字号 : 10pt (加粗)

变量
字号 : 8pt

字号 : 7pt

变量
字号 : 8pt (加粗)

Balance Box



Outer carton box



inner box