



adler®

AX7 gPV 1000 / 1500VDC Fuse




FEATURES:

- 1000 / 1500 VDC, PV fuse link
- Rated Current: 125-250 A
- Rated Breaking Capacity: 10 kA
(Self - Certificated : 50 kA)
- Time Constant: 1-3 ms
- Approvals: UL (File: E490190)

ELECTRICAL SPECIFICATIONS


Part Number	Rated Current	Ampere Code	Breaking Capacity	I ² t (A ² s)		Dissipation(W)		Certifications
				Pre-Arcing	Total at 1500 V	80% I _n	100% I _n	
AX73125700	125 A	3125	10 kA@1000 VDC	1975.2	12516	18.4	32.8	●
AX73160700	160 A	3160		3333.6	20985.6	22.4	38.4	●
AX73200700	200 A	3200		7986.4	48375.2	25.6	45.6	●
AX73250700	250 A	3250		8547	57820	35.8	70.2	●
AX73125b00	125 A	3125	10 kA@1500 VDC	2469	15645	23	41	●
AX73160b00	160 A	3160		4167	26232	28	48	●
AX73200b00	200 A	3200		9983	60469	32	57	●
AX73250b00	250 A	3250		18078	101563	39	68	●

DIMENSIONS (mm)

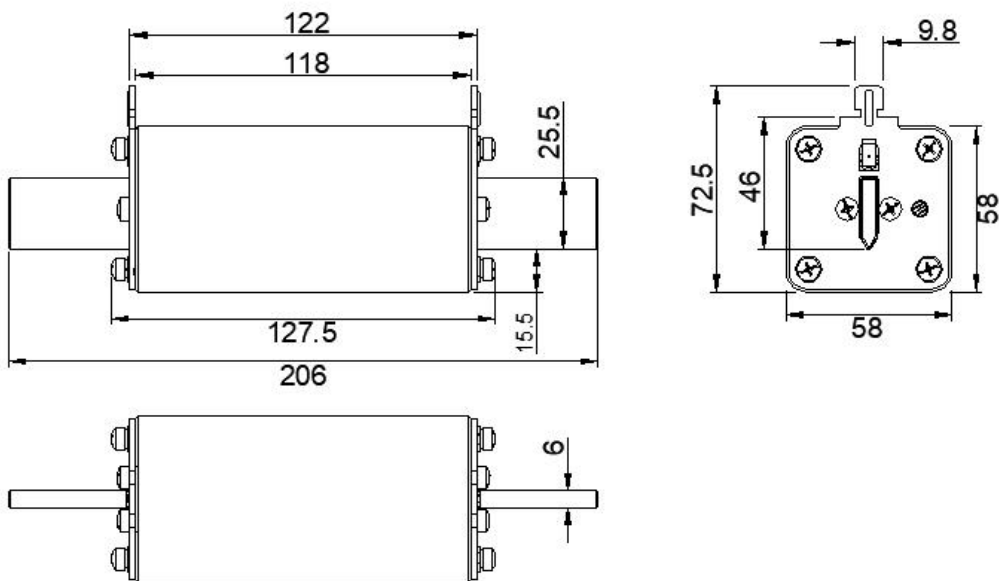



adler®
PART NUMBER SYSTEM

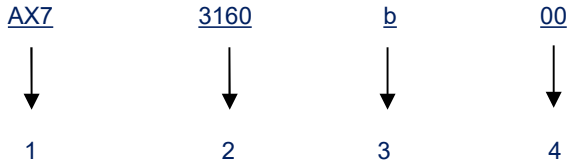

- 1Product Series AX7
- 2 Ampere Code 160 A (see ampere code column of electrical specifications)
- 3Rated Voltage..... 7: 1000 V; b: 1500 V
- 4 Supplementary Code 00: default

Average Current Curve(I-T Curve)

